

Model Solution

We will assume the relationship of the form:

$$P = f(W) h(\theta)$$

$$M_p = f(M_w) h(\theta)$$

M_w represents the mass in the hanger (Load)

M_p represents the mass in the pan + the mass of the pan (i.e. $M'_p + M_{pan}$) (Effort)

The relation between these variables can be found in two parts:

- Relation between M_p and M_w
- Relation between M_p and θ


Part 1:

Mass of the pan = 28.6 g

$\theta = \pi$ radians

Obs. No.	M_w/g	M'_{p-}/g	M'_{p+}/g	$M'_{p(average)}/g$	$M_{p(average)} = M'_{p(average)} + M_{pan}/g$	$\Delta M_p = \frac{M'_{p+} - M'_{p-}}{2}/g$
1	800.0	566	574	570	598.6	4
2	700.0	486	494	490	518.6	4
3	600.0	417	423	420	448.6	3
4	500.0	337	343	340	368.6	3
5	400.0	267	273	270	298.6	3
6	300.0	188	192	190	218.6	2
7	200.0	113	117	115	143.6	2
8	100.0	41	43	42	70.6	1

Graph of M_p v/s M_w :

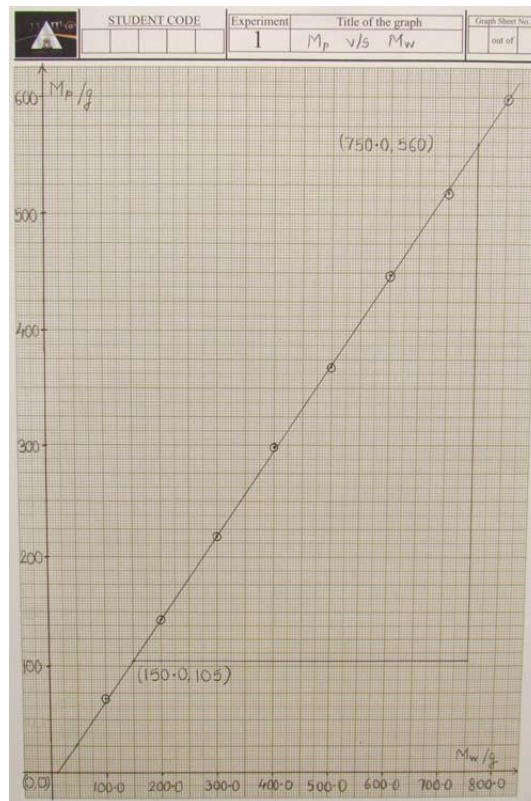

Slope of the graph = 0.7583

This shows that


$$P \propto W \quad (1)$$

Part 1:

$$M_w = 800.0 \text{ g}$$

$$M_{\text{pan}} = 28.6 \text{ g}$$

Obs. No.	θ /rad	M'_{p-} /g	M'_{p+} /g	$M'_{p(\text{average})}$ /g	$M_{p(\text{average})} = M'_{p(\text{average})} + M_{\text{pan}}$ /g	$\Delta M_p = \frac{M'_{p+} - M'_{p-}}{2}$ /g
1	π	565	575	570	598.6	5
2	$3\pi/2$	455	465	460	488.6	5
3	2π	396	404	400	428.6	4
4	$5\pi/2$	316	324	320	348.6	4
5	3π	276	284	280	308.6	4
6	$7\pi/2$	236	244	240	268.6	4
7	4π	182	188	185	213.6	3
8	$9\pi/2$	147	153	150	178.6	3
9	5π	133	137	135	163.6	2
10	$11\pi/2$	104	110	107	135.6	3
11	6π	88	92	90	118.6	2
12	$13\pi/2$	68	72	70	98.6	2
13	7π	54	56	55	83.6	1
14	$15\pi/2$	39	41	40	68.6	1
15	8π	29	31	30	58.6	1
16	$17\pi/2$	18	20	19	47.6	1

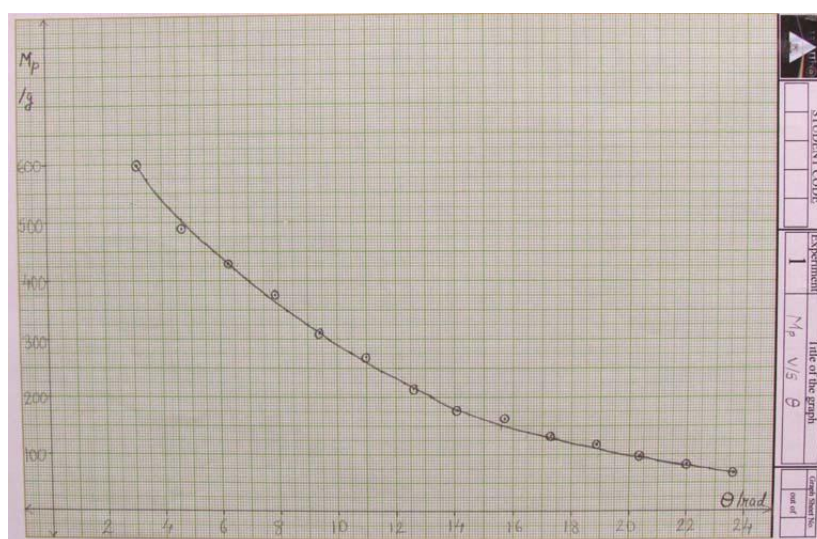

The graph between M_p and θ shows a curve.

There can be possibilities of different functional relationship.

1)

The possible functions can be $\frac{1}{\theta}$, $\frac{1}{\theta^2}$, $e^{-k\theta}$

For the first two functions mentioned above, at $\theta = 0$, M_p will reach infinite value which is not possible. For the third function we know that M_p will have some finite value.

2)

If the function is anticipated as exponential one then it can be verified using half value technique whether at every half value of M_p , and then plotting $\ln M_p$ or better still

$\ln\left(\frac{M_p}{M_w}\right)$ against θ .

If it is a straight line with slope $-k$,

$$M_p \propto e^{-k\theta}$$

or

$$P \propto e^{-k\theta} \quad (2)$$

From (1) and (2),


$$P \propto W e^{-k\theta} \quad (3)$$

The constant k in the above expression is equated to the coefficient of friction, μ .

$$P = C W e^{-\mu\theta} \quad (4)$$

The constant of proportionality in equation (4) is 1. This is because at $\theta = 0$ rad, $P = W$.

$$P = W e^{-\mu\theta} \quad (5)$$

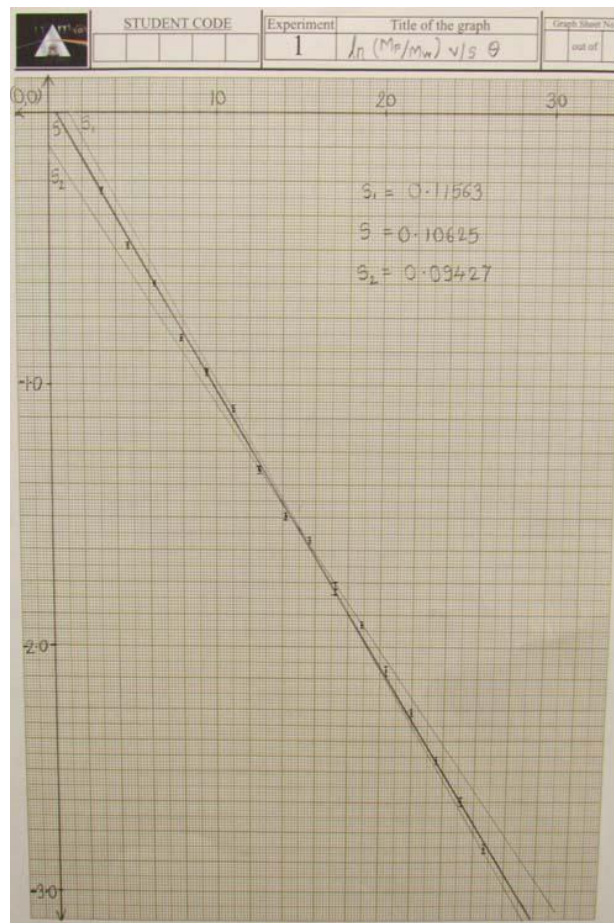

From the graph,

$$\ln\left(\frac{M_p}{M_w}\right) = -\mu\theta$$

where μ is the slope of the graph.

From the graph, $\mu = 0.106$

$$\frac{\Delta S}{S} = \frac{(S_1 \sim S_2) / 2}{S} = 0.10049$$

$$\Delta S = 0.01067 = \Delta\mu$$

$$u_c(\mu) = 0.00616$$

$$U(\mu) = 0.0123 \approx 0.02$$

$$\mu = 0.11 \pm 0.02$$

Part 2:

When the pan is moving up:

$$M_{p1} = M_u e^{-\mu\theta} \quad (6)$$

When the pan is moving down:

$$M_{p2} = M_u e^{\mu\theta} \quad (7)$$

M'_{p1}		$M'_{p1(average)}$	$\Delta M'_{p1}$	$M_{p1} = M'_{p1} + M_{pan}$
M'_{p1+}	M'_{p1-}			
164	156	160	4	188.6

M'_{p2}		$M'_{p2(average)}$	$\Delta M'_{p2}$	$M_{p2} = M'_{p2} + M_{pan}$
M'_{p2+}	M'_{p2-}			
49	45	47	2	75.6

For M_u :

Multiplying equation (6) and (7),

$$M_u = \sqrt{M_{p1} \cdot M_{p2}}$$

$$M_u = \sqrt{188.6 \times 75.6} = 119.4075 \text{ g}$$

For μ :

Dividing equation (6) by (7),

$$\frac{M_{p1}}{M_{p2}} = e^{2\mu\theta}$$

$$\mu = \frac{1}{2\theta} \ln \left(\frac{M_{p1}}{M_{p2}} \right)$$

For $\theta = \pi$

$$\mu = \frac{1}{2\pi} \ln \left(\frac{M_{p1}}{M_{p2}} \right)$$

$$\mu = \frac{1}{2\pi} \ln\left(\frac{188.6}{75.6}\right) = 0.1456$$

Uncertainty in M_u :

$$\frac{\Delta M_u}{M_u} = \sqrt{\left(\frac{1}{2} \frac{\Delta M_{p1}}{M_{p1}}\right)^2 + \left(\frac{1}{2} \frac{\Delta M_{p2}}{M_{p2}}\right)^2} = \sqrt{\left(\frac{1}{2} \frac{4}{188.6}\right)^2 + \left(\frac{1}{2} \frac{2}{75.6}\right)^2} = 0.0169$$

$$\Delta M_u = 0.0169 \times 119.4075 = 2.018$$

$$u_c(M_u) = \frac{1}{\sqrt{3}} \times 2.018 = 1.165$$

$$U(M_u) = 2 \times u_c(M_u) = 2 \times 1.165 = 2.33 \approx 3$$

$$M_u = 119 \pm 3 \text{ g}$$

Uncertainty in μ_u :

$$u_c(\mu_u) = \frac{1}{\sqrt{3}} \cdot \Delta \mu_u = \frac{1}{2\pi\sqrt{3}} \sqrt{\left(\frac{\Delta M_{p1}}{M_{p1}}\right)^2 + \left(\frac{\Delta M_{p2}}{M_{p2}}\right)^2} = \frac{1}{2\pi\sqrt{3}} \sqrt{\left(\frac{4}{188.6}\right)^2 + \left(\frac{2}{75.6}\right)^2} = 0.003117$$

$$U(\mu_u) = 2 \times u_c(\mu_u) = 2 \times 0.003117 = 0.00623 \approx 0.007$$

$$\mu_u = 0.146 \pm 0.007$$